


OBSERVATION WINDOW WITH GASKET (POLYCARBON OR PLEXI USED)

SHEET METAL PANEL



BENDED SHEET IS WELDED ON PROFILE FRAME

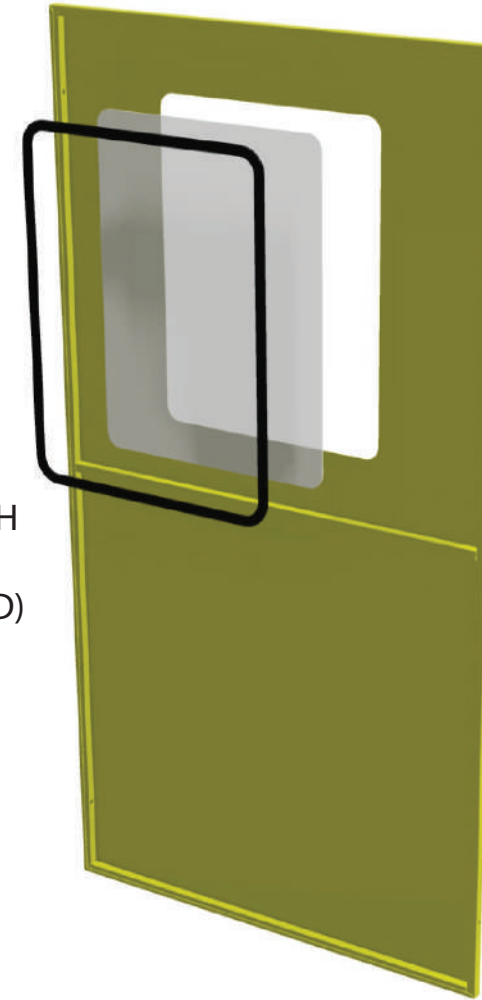

STRONG POST BASE STRUCTURE

Roldory sheet metal panels are used in welding applications and applications where there is a risk of liquid splash. Roldory sheet panels are very durable due to the support of 1.5 mm thick sheet steel with a 20x20 mm profile frame. Transparent, colored polycarbonate or plexi viewing windows can be added to the panels. Special red transparent plexies are used to prevent harmful UV rays in welded manufacturing areas. Observation windows can be made on request besides standard dimensions. The observation windows are connected to the panel with gasket without using any bolts.

DOORS




Hinged Doors
Single Hinged Door 500-1000mm
Double Hinged Door 1000-2000mm



Sliding Doors
500-1000mm

Door Lock Options: Standart lock is magnetic lock.
Also door can be prepared according to preferred lock. (Euhcner, Pizzato, Pilz etc.)

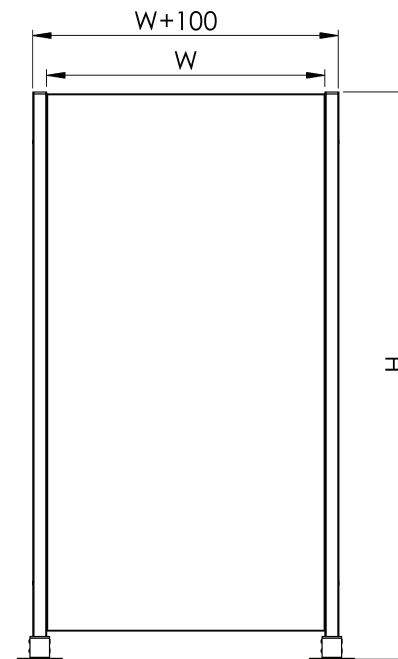

TECHNICAL DETAILS

Height(H):	2000mm
Panel Width(W):	200, 300, 500, 600, 800, 1000mm
Sheet Metal Thickness:	1.5mm
Post Tube Size:	50x50x2mm
Panel Tube Size:	20mm
Standart Colour:	Posts RAL9005, Panels RAL1018
Panels and posts can be supplied in other colour of choice.	